

BFGoodrich®

CROSS CONTROL® D

Get the traction and durability you need to get the tough jobs done with this aggressive on/off-road drive tire.



TERRAIN-GRIPPING TRACTION

Takes on snow, dirt and soft soil


- 25% more lugs on the road
- Serrated shoulder conquers most any condition.
- Maintains open lugged design at new and worn⁽¹⁾



DOWNTIME-FIGHTING DURABILITY

Protects against road hazards

- Full-coverage protector ply 75% wider than a leading competitor.⁽²⁾

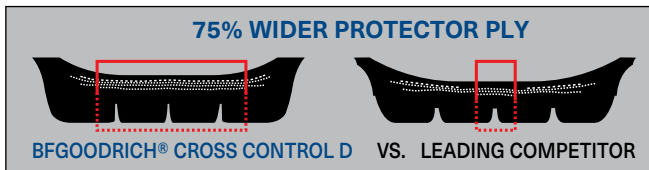

- Special anti-cut, chip-resistant compounds
- Thick sidewalls to fight impacts and abrasion.



RETREADABILITY COMES STANDARD

Gives you multiple lives

- Groove bottom protectors reduce stone drilling.
- Heat release technology keeps your casing running cool in tough conditions.



Application	Highway	Regional	Urban	Coach/Bus	On/Off-Road

Position	Steer	Drive	Trailer

■ Recommended Application ■ Acceptable Application



GUARANTEED. OVER THE LONG HAUL.

If you're not completely satisfied with the BFGoodrich® CROSS CONTROL® tire's traction performance or the tire is taken out of service (not repairable or retreadable) in the first six months or before 50% of its usable tread life—whichever comes first—we will reimburse 50% of your acquisition price per tire.⁽⁵⁾

Size	Load Range	Catalog Number	Tread Depth 32nds	Max. Speed (3) mph	Loaded Radius		Overall Diameter		Overall Width (4)		Approved Wheels (Measuring wheel listed first)	Min. Dual Spacing (2)		Revs Per Mile	Max. Load Per Tire Single				Max. Load Per Tire Dual			
					in.	mm.	in.	mm.	in.	mm.		in.	mm.		lbs.	psi	kg.	kPa	lbs.	psi	kg.	kPa
11R22.5	H	08038	29	68	19.7	501	42.1	1070	11.3	288	8.25, 7.50	12.5	318	491	6610	120	3000	830	6005	120	2725	830
11R24.5	H	38810	29	68	20.7	525	44.1	1121	11.2	285	8.25, 7.50	12.5	318	469	7160	120	3250	830	6610	120	3000	830

Note: Wheel listed first is the measuring wheel.

(1) Protector ply width compared to the Yokohama LY053 in size 11R24.5 LRH. Actual results may vary.

(2) Footprint study of a Yokohama® LY053 tire and a BFGoodrich® Cross Control D tire in size 11R24.5 LRH machine buffed to approximately 10 mm of remaining tread. Tires measured LRH under a load of 3250 kg with an internal pressure of approx. 8.3 bar. Actual results may vary.

(3) Exceeding the lawful speed limit is neither recommended nor endorsed.

(4) Tire section widths and overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in wheel width. Minimum dual spacing should be adjusted accordingly.

(5) See BFGoodrichTruckTires.com > Reference Materials > Warranties/Guarantees for details.

BFGoodrich® tires are subject to a continuous development program. BFGoodrich® Commercial Truck Tires reserves the right to change product specifications at any time without notice or obligation.

MNA, Inc. continually updates its product information to reflect any changes in Industry Standards. Printed material may not reflect the current Load and Inflation information. Please visit www.bfgoodrichtrucktires.com for the latest product information. The actual load and inflation pressure used must not exceed the wheel manufacturer's maximum conditions. Never exceed a wheel manufacturer's limits without permission from the component manufacturer.